


# Wall mounted inlet

Part number: 333

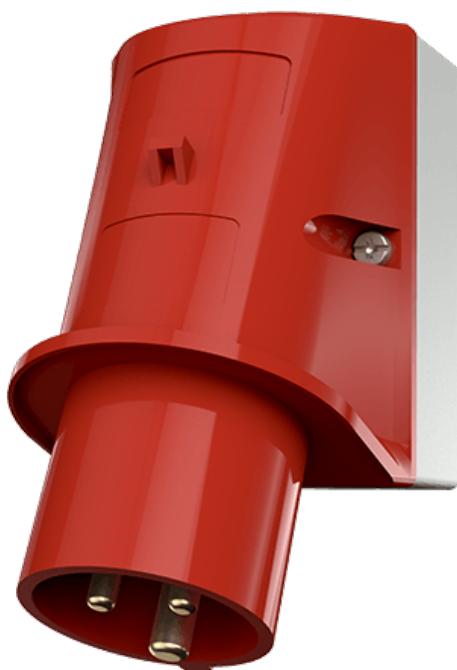

**MENNEKES**  
Elektrotechnik GmbH & Co. KG

Aloys-Mennekes-Straße 1  
57399 Kirchhundem  
GERMANY

[www.MENNEKES.org](http://www.MENNEKES.org)

# Product Description

- screw connection technology
- internal fixing
- 25° inclination
- enclosure base with stamped recess for quick cutting out
- cable entry also possible on the back side

# Technical Details

| Wall mounted inlet                    | 333                    |
|---------------------------------------|------------------------|
| Ampere                                | 16A                    |
| Number of poles                       | 3p                     |
| Clock position                        | 9h                     |
| Nominal voltage AC                    | 400V                   |
| Nominal frequency                     | 50 - 60 Hz             |
| Protection type IP                    | IP44                   |
| Contact carrier                       | standard               |
| Connection                            | screw terminals        |
| Tightening torque connection terminal | slot                   |
| Tightening torque external screws     | PZ2, slot              |
| Phase inverter                        | without phase inverter |
| Pilot contact                         | without pilot contact  |
| Cable entry at the top                | 1 x M20                |
| Cable entry at the bottom             | 1 x M20 (blind)        |
| Blind cable entry at the rear         | yes                    |
| Enclosure base can be turned 180°     | no                     |
| Insertion direction                   | angled                 |
| Inclination                           | 25°                    |
| Type of mounting                      | internal fixing        |
| Military version                      | no                     |
| Protection cap                        | without protection cap |
| Tightening torque connection terminal | 0.8 Nm                 |
| Conductor cross-section min.          | 1 mm <sup>2</sup>      |
| Conductor cross-section max.          | 2.5 mm <sup>2</sup>    |

|                             |               |
|-----------------------------|---------------|
| Wall mounted inlet          | 333           |
| Weight (net)                | 148 g         |
| Packaging unit              | 10 pcs        |
| Quantity per pallet         | 880 pcs       |
| EAN / identification number | 4015394002390 |

| Permissible ambient conditions    |        |       |
|-----------------------------------|--------|-------|
|                                   | Min.   | Max.  |
| Permissible ambient temperature   | -25 °C | 40 °C |
| Average temperature over 24 hours |        | 35 °C |


| Material properties |                                   |
|---------------------|-----------------------------------|
| Base                | PA6 light grey [similar RAL 7035] |
| Upper part          | PA6 red [similar RAL 3013]        |
| External screws     | galvanised steel                  |

| Material resistance                                                                                                          |
|------------------------------------------------------------------------------------------------------------------------------|
| The material resistance overview can be found on the website in the section "Knowledge" - "Product knowledge" - "Materials". |

| Material and environmental properties |     |
|---------------------------------------|-----|
| RoHS 2011/65/EU incl. 2015/863/EU     | ✓   |
| POP regulation (EU) 2019/1021         | ✓   |
| Halogen-free                          | yes |

| Regulations and Standards |                    |
|---------------------------|--------------------|
| Norm                      | DIN EN IEC 60309-2 |
| Declaration of Conformity | CE                 |
| Test label                | EAC, CQC           |

# Dimensional Drawing

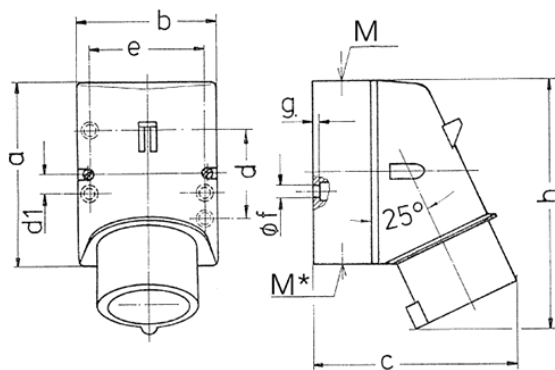

| Drawing                                          | Amp.<br>Poles | 16                         |        |        | 32                         |        |        |
|--------------------------------------------------|---------------|----------------------------|--------|--------|----------------------------|--------|--------|
|                                                  |               | 3                          | 4      | 5      | 3                          | 4      | 5      |
| 2 MB 32                                          |               |                            |        |        |                            |        |        |
| Dim. in mm                                       | a             | 87                         | 100    | 100    | 128                        | 128    | 128    |
|                                                  | b             | 64                         | 75     | 75     | 84                         | 84     | 84     |
|                                                  | c             | 93                         | 106    | 110    | 133                        | 133    | 135    |
|                                                  | d             | 40                         | —      | —      | —                          | —      | —      |
|                                                  | d1            | —                          | 10.5   | 10.5   | 11                         | 11     | 11     |
|                                                  | e             | 50.5                       | 59     | 59     | 68                         | 68     | 68     |
|                                                  | f             | 4,5                        | 5      | 5      | 5.3                        | 5.3    | 5.3    |
|                                                  | g             | 4                          | 4      | 4      | 4                          | 4      | 4      |
|                                                  | h             | 122                        | 133    | 135    | 169                        | 169    | 170    |
|                                                  | M             | 20                         | 20     | 20     | 32                         | 32     | 32     |
|                                                  | M*            | 1x20 (blind) to be cut out |        |        | 2x25 (blind) to be cut out |        |        |
| Max. cable diam. (mm)                            |               | 15                         | 15     | 15     | 18/25                      | 18/25  | 18/25  |
| Terminal for cond. cross section (mm²) min.-max. |               | 1 —2.5                     | 1 —2.5 | 1 —2.5 | 2.5 —6                     | 2.5 —6 | 2.5 —6 |