


Wall mounted receptacle

Part number: 75116

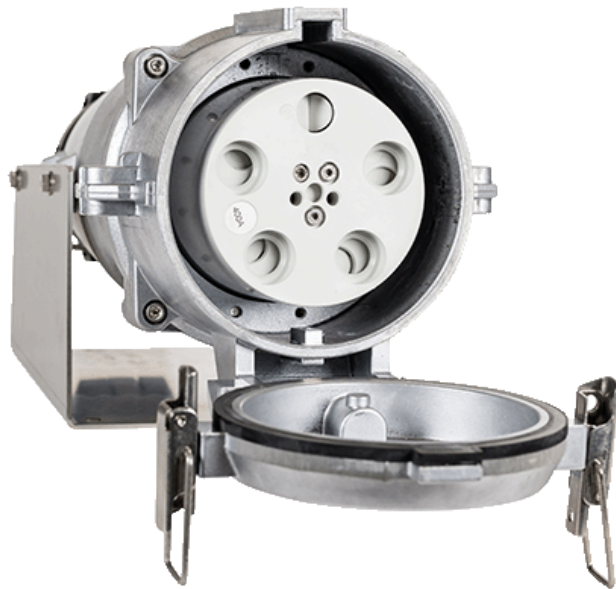

MENNEKES
Elektrotechnik GmbH & Co. KG

Aloys-Mennekes-Straße 1
57399 Kirchhundem
GERMANY

www.MENNEKES.org

Product Description

- MetalLine
- aluminium enclosure
- silver plated contacts, highly heat resistant contact carrier
- external fixing
- 10° inclination
- with cable gland
- sea water products are available on request
- if required, pilot cables can be introduced separately into enclosures, please add "PK" to the part number

Technical Details

Wall mounted receptacle	75116
Ampere	400A
Number of poles	5p
Clock position	6h
Nominal voltage AC	400V
Nominal frequency	50 - 60 Hz
Protection type IP	IP67
Contact carrier	silver plated contacts, highly heat resistant contact carrier
X-CONTACT	no
Connection	cage terminals
Contact screw drive	allen key
Pilot contact	2 pilot contacts
Pilot contact switch	no
Blind cable entry at the rear	no
Enclosure base can be turned 180°	no
Insertion direction	angled
Inclination	10°
Type of mounting	external fixing
Highly resistant to chemicals	no
Military version	no
Lockable	no
Tightening torque connection terminal	16 Nm
Strip length jacket	200 mm

Wall mounted receptacle		75116
Strip length solid conductor		60 mm
Conductor cross-section min.		70 mm ²
Conductor cross-section max.		240 mm ²
Conductor cross-section pilot max.		4 mm ²
IK code		IK10
Weight (net)		11000 g
Packaging unit		1 pcs
Quantity per pallet		18 pcs
EAN / identification number		4015394115410

Permissible ambient conditions

	Min.	Max.
Permissible ambient temperature	-40 °C	100 °C

Material properties

Housing	aluminium grey [no RAL colour code]
Front part	aluminium grey [no RAL colour code]
Hinged lid	metal grey [no RAL colour code]

Material resistance

The material resistance overview can be found on the website in the section "Knowledge" - "Product knowledge" - "Materials".

Material and environmental properties

RoHS 2011/65/EU incl. 2015/863/EU	✓
POP regulation (EU) 2019/1021	✓
Halogen-free	yes

Regulations and Standards

Norm	DIN EN IEC 60309
Declaration of Conformity	CE
Test label	EAC

Dimensional Drawing

Drawing
1 MB 389/1

Dim. in mm

