

Wall mounted receptacle DUO R

Part number: 75143



MENNEKES
Elektrotechnik GmbH & Co. KG

Aloys-Mennekes-Straße 1
57399 Kirchhundem
GERMANY

www.MENNEKES.org

Product Description

- EcoLine
- pre-wired for installation
- mechanical DUO-interlock
- switch 3p
- highly heat resistant contact carrier, nickel plated contacts
- external fixing
- 15° inclination
- cable entry bushing for cables of 20 mm up to 70 mm at top and blind flange at bottom
- enclosure made of sheet steel, painted in RAL 1021
- sea water products are available on request

Technical Details

Wall mounted receptacle DUO R - Part No. 75143	75143
Product serie	DUO R
Ampere	160A
Number of poles	4p
Clock position	6h
Nominal voltage AC	400V
Nominal frequency	50 - 60 Hz
Protection type IP	IP67
Contact carrier	highly heat resistant contact carrier, nickel plated contacts
X-CONTACT	no
Screw drive external screws	hexagon
Pilot contact	2 pilot contacts
Pilot contact switch	no
Load break switch	160A 3p
DIN rail	no
Inspection window	no
Enclosure base can be turned 180°	no
Insertion direction	angled
Inclination	15°
Type of mounting	external fixing
Highly resistant to chemicals	no
LED voltage indicator	no

Wall mounted receptacle DUO R - Part No. 75143	75143
Tightening torque external screws	20 Nm
Conductor cross-section min.	35 mm ²
Conductor cross-section max.	150 mm ²
Conductor cross-section pilot max.	4 mm ²
IK code	IK07
Weight (net)	22900 g
Packaging unit	1 pcs
Quantity per pallet	6 pcs
EAN / identification number	4015394000778

Permissible ambient conditions

	Min.	Max.
Permissible ambient temperature	-40 °C	70 °C

Material properties

Housing	sheet steel yellow [similar RAL 1021]
Front part	aluminium grey [no RAL colour code]
Hinged lid	plastic blue [no RAL colour code]
Rotary handle	plastic red [no RAL colour code]
External screws	stainless steel bare

Material resistance

The material resistance overview can be found on the website in the section “Knowledge” - “Product knowledge” - “Materials”.

Material and environmental properties

RoHS 2011/65/EU inkl. 2015/863/EU	✓
POP regulation (EU) 2019/1021	✓
Halogen-free	yes

Regulations and Standards


Norm

DIN EN IEC 60309

Declaration of Conformity

CE

Dimensional Drawing

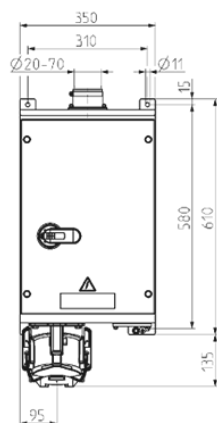

Drawing
1 MB 728

Dim. in mm