


# Wall mounted receptacle

Part number: 75221

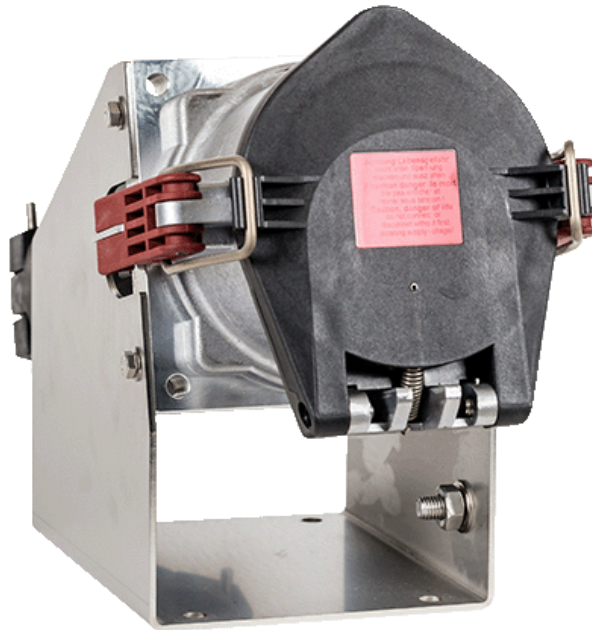

**MENNEKES**  
Elektrotechnik GmbH & Co. KG

Aloys-Mennekes-Straße 1  
57399 Kirchhundem  
GERMANY

[www.MENNEKES.org](http://www.MENNEKES.org)

## Product Description

- EcoLine
- plastic enclosure
- aluminium front part
- nickel plated contacts, highly heat resistant contact carrier
- external fixing
- 15° inclination
- with cable gland
- sea water products are available on request
- if required, pilot cables can be introduced separately into enclosures, please add "PK" to the part number

## Technical Details

| Wall mounted receptacle               | 75221                                                         |
|---------------------------------------|---------------------------------------------------------------|
| Ampere                                | 200A                                                          |
| Number of poles                       | 4p                                                            |
| Clock position                        | 6h                                                            |
| Nominal voltage AC                    | 400V                                                          |
| Nominal frequency                     | 50 - 60 Hz                                                    |
| Protection type IP                    | IP67                                                          |
| Contact carrier                       | nickel plated contacts, highly heat resistant contact carrier |
| X-CONTACT                             | no                                                            |
| Connection                            | cage terminals                                                |
| Contact screw drive                   | allen key                                                     |
| Pilot contact                         | 2 pilot contacts                                              |
| Pilot contact switch                  | no                                                            |
| Blind cable entry at the rear         | no                                                            |
| Enclosure base can be turned 180°     | no                                                            |
| Insertion direction                   | angled                                                        |
| Inclination                           | 15°                                                           |
| Type of mounting                      | external fixing                                               |
| Highly resistant to chemicals         | no                                                            |
| Military version                      | no                                                            |
| Lockable                              | no                                                            |
| Tightening torque connection terminal | 8 Nm                                                          |
| Strip length jacket                   | 150 mm                                                        |

|                                    |                     |
|------------------------------------|---------------------|
| Wall mounted receptacle            | 75221               |
| Strip length solid conductor       | 30 mm               |
| Conductor cross-section min.       | 35 mm <sup>2</sup>  |
| Conductor cross-section max.       | 150 mm <sup>2</sup> |
| Conductor cross-section pilot max. | 4 mm <sup>2</sup>   |
| IK code                            | IK10                |
| Weight (net)                       | 6640 g              |
| Packaging unit                     | 1 pcs               |
| Quantity per pallet                | 18 pcs              |
| EAN / identification number        | 4015394055532       |

#### Permissible ambient conditions

|                                 | Min.   | Max.   |
|---------------------------------|--------|--------|
| Permissible ambient temperature | -40 °C | 100 °C |

#### Material properties

|            |                                     |
|------------|-------------------------------------|
| Housing    | plastic black [no RAL colour code]  |
| Front part | aluminium grey [no RAL colour code] |
| Hinged lid | plastic black [no RAL colour code]  |

#### Material resistance

The material resistance overview can be found on the website in the section "Knowledge" - "Product knowledge" - "Materials".

#### Material and environmental properties

|                                   |     |
|-----------------------------------|-----|
| RoHS 2011/65/EU incl. 2015/863/EU | ✓   |
| POP regulation (EU) 2019/1021     | ✓   |
| Halogen-free                      | yes |

Regulations and Standards

Norm

DIN EN IEC 60309


Declaration of Conformity

CE

Test label

EAC

# Dimensional Drawing

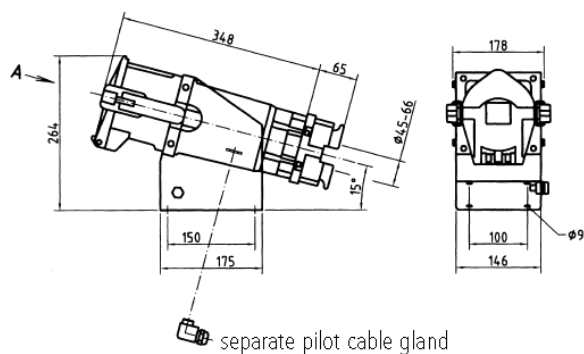

Drawing  
1 MB 385

Dim. in mm